

**STINGER® LED HL™ / STINGER DS® LED HL™
HIGH LUMEN RECHARGEABLE FLASHLIGHT**

MARKET APPLICATIONS: Law Enforcement, Sporting Goods, Security, Fire & Rescue, Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION: Compact & extremely powerful, the Stinger® LED HL™ and Stinger DS® LED HL™ rechargeable flashlights offer 3 microprocessor controlled intensity modes, strobe mode and the latest in high power LED technology. The Stinger DS® LED HL™ includes a second independent easy to locate tactical tailcap switch. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

CASE MATERIAL: 6000 series machined aircraft aluminum with non-slip rubberized comfort grip with anti-roll rubber ring.

DIMENSIONS: Stinger® LED HL™ Length: 8.41 in. (21.36 cm) Diameter: Major Diameter: 1.62 in. (4.11 cm)
Stinger DS® LED HL™ Length: 8.85 in. (22.48 cm) Body Diameter: 1.17 in. (2.97 cm)

WEIGHT: Stinger® LED HL™: 12.4 oz (352 grams)* Stinger DS® LED HL™: 12.8 oz (364 grams)*

LENS: Unbreakable polycarbonate with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See Chart. Optimized electronics provides regulated intensity. Deep-dish parabolic reflector produces a concentrated beam with optimum peripheral illumination.



ON/OFF: Multi-function, easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations. Stinger DS® LED HL™ provides a second multi-function push-button tactical tailswitch where both switches offer full feature control independent of each other.

RUN TIME: See Chart. Strobe: 3 continuous hours.



BATTERY: 3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times offered in all systems.

CHARGING: Fits existing Stinger®chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC, or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

FEATURES: C4® LED technology for extreme brightness. IPX4 Rated for water resistant operation. 1 meter impact resistance tested. Serialized for positive identification. LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.




WARRANTY: Streamlight's Limited Lifetime Warranty.

APPROVALS: Meets applicable European Community Directives. **CE**

OPTIONAL ACCESSORIES: Safety wands, ring holder, holster, color filters, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

	FL 1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT	 640 LUMENS	640 LUMENS	340 LUMENS	170 LUMENS
RUN TIME	 1h 15min	1h 15min	2h	4h
DISTANCE	 297m	297m	210m	148m
INTENSITY	 22,000cd	22,000cd	11,000cd	5,500cd

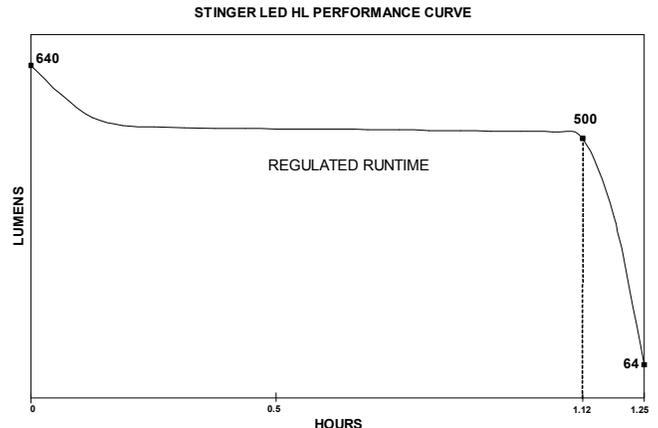

* With battery (included in purchase)

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 12/10/12

Revised: Rev: 0

Assembled In The USA.

Document #226