

PRODUCT FACT SHEET

STINGER® LITE PIPE RECHARGEABLE WORKLIGHT

MARKET

APPLICATIONS: Hardware/Tool, Automotive, Industrial, Consumer

DESCRIPTION: Useful and durable, the STINGER® Lite Pipe rechargeable worklight offers an 8 LED cone of light. The

combination of the rechargeable battery and 8 LEDs result in a broad uniform flood pattern that can be inserted in tight spaces. Ships with durable rotatable hook. Retrofit kit available as an upgrade for all

Stinger incandescent models.

CASE MATERIAL: Body: 6000 series machined aircraft aluminum with anti-roll rubber ring.

Cone: Clear polycarbonate with scratch-resistant coating.

Hook: Impact modified nylon, black.

DIMENSIONS: Length: 19.62 in. (49.84 cm) Diameter: Major Diameter: 1.50 in. (3.81 cm)

Body Diameter: 1.07 in. (2.71 cm)

WEIGHT: 12.3 oz (339 grams) with battery (included with system purchase).

LENS: Impact resistant polycarbonate cone with scratch-resistant coating. O-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: 220 LUMENS

220-LUMENS

ON/OFF: Easy access head mounted push-button switch designed for extremely long life; tested at 1 million actuations.

RUN TIME: 3 Hours 15 Minutes.

3h 15min

BATTERY: 3-cell, 3.6 Volt Ni-Cd sub-C battery, rechargeable up to 1000 times.

3-cell, 3.6 Volt Ni-MH sub-C battery, rechargeable up to 1000 times offered in 230VAC and 12VDC European

systems.

CHARGING: Fits existing Stinger®chargers. Steady charger fully recharges in 10 hours on 100V, 120V, 230V or 240VAC,

or 12VDC. 2.5 hour fast charger or PiggyBack® charger models available.

FEATURES: 8 LEDs for uniform brightness.


IPX4 Rated for water resistant operation. 1 meter impact resistance tested. Serialized for positive identification.

LED Charge-continuity indicator on charger base. Compact, snap-in charger mounts in any position.

WARRANTY: Streamlight's Limited Lifetime Warranty.

OPTIONAL Ring holder, 5-unit bank charger, 2.5 hour fast charger, or Piggy-Back® charger that allows for simultaneous charging of light and battery.

STINGER LITE PIPE PERFORMANCE CURVE

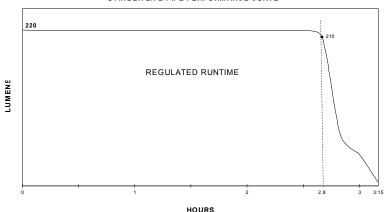

All performance claims to ANSI/NEMA FL1-2009 Standard

Issued: 10/18/12

Revised: Rev: 0 Assembled In The USA. Document #228