

INSTALLATION INSTRUCTIONS

1. Position wing hinges on transmission hump or against recessed partition wall and mark for drilling. Check back side for fuel or electrical lines before drilling. Drill holes and install. (Bolts provided).
2. Bolt wing hinges together. (carriage bolts, washers, and acorn nuts provided)
3. Attach butt plates to wing hinges. Do not tighten set screws completely just yet.
4. Position SC-502 18" flat bar vertically above the butt plate in which the patrol rifle will be secured and mark holes for drilling. Drill holes.
5. Slide flat bar into the rectangular hole in the bottom of the SC-5 lock. Using supplied thick washers under the flat bar mounting holes, bolt the flat bar and gunlock assembly to the partition wall with 5/16" carriage bolts. (included.)
6. With the rifle in the SC-5 gunlock, position the lock so that the rifle is secured and cannot be lifted out of the butt plate. Remove the rifle and secure the gunlock to the flat bar with the 5/32" Allen key. (provided)
7. Attach SC-1 gunlock to one leaf of the 9302 mounting hinge with the screws provided with the gunlock.
8. With the pump shotgun in the lock, and the butt of the shotgun securing in the second butt plate, mark holes on the other leaf of the 9302 mounting on the partition wall. Drill holes and install.
9. Place weapons in setup, test and retest installation. When satisfied, tighten all screws and bolts and test again.

IMPORTANT

Should you have any problem installing or using Santa Cruz products, we are here to help you every step of the way. Just give us a call on our toll free number (800) 847-5428 and we will be glad to help you with the installation, special part request, or any other way you might need assistance.

OTHER PRODUCTS AVAILABLE FROM SANTA CRUZ

Gunlocks:

- o Model SC-1 for pump shotguns
- o Model SC-1B pump shotgun or rifle
- o Model SC-1/AR for automatic shotguns
- o Model SC-5 Universal for any weapon

Mounting Brackets:

- o Model SC-915/P Partition Wall
- o Model SC-915-D Dual Partition Wall
- o Model SC-917 Wall or Trunk
- o Model SC-934 Overhead
- o Model SC-916 Fixed Wall / Trunk

Accessories:

- o Solenoid (SC-1909)
- o Spare keys (specify style or number)
- o Butt Plates (SC-1900 adjustable / 1901 fixed)
- o Timers: 10 & 30 second delay
- o Mounting Hinges (SC-9302)
- o 18" flat bars for adjustable mounting

LIMITED WARRANTY

Santa Cruz Gunlocks, LLC. (SCG) warrants this product to be free of defects in material and workmanship under normal use for one year from the date of purchase.

SCG makes no other express or implied warranties of the Product. The purchaser's sole and exclusive remedy in the event of breach of warranty is expressly limited to, at SCG's election, repair, refurbishment, or replacement of the defective product with the same version or an upgrade or, if replacement is not possible, a refund of the purchase price. Repair parts and replacement products will be provided on an exchange basis and will be either reconditioned or new. This limited warranty does not cover damage to the product resulting from accident, disaster, misuse, abuse, negligence, improper installation or modification or repair of the product by anyone other than by SCG. Limited warranty service may be obtained by returning the product to SCG at the address below.

THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow the exclusion of implied warranties, so their exclusion above may not apply to you.

LIMITATION OF LIABILITY

NEITHER SCG NOR ITS AUTHORIZED DEALER SHALL BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN AN ACTION IN CONTRACT OR TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY), SUCH AS, BUT NOT LIMITED TO, LOSS OF ANTICIPATED PROFITS OR BENEFITS RESULTING FROM THE USE OF THE PRODUCT OR ANY BREACH OF ANY WARRANTY, EVEN IF SCG OR ITS AUTHORIZED REPRESENTATIVE HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT WILL SCG OR ITS AUTHORIZED REPRESENTATIVES LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT.

SANTA CRUZ GUNLOCKS, LLC.

450 Tyler Rd
Webster, NH 03303
Phone (603) 746-7740 Fax: (603) 746-7764
1-800-847-5428
E-mail: info@santacruzgunlocks.com
Web page: www.santacruzgunlocks.com



SC-915-D-15 Dual Setup

for a pump shotgun plus any rifle on the partition wall

Santa Cruz Model SC-915-D-15 dual mounting system was designed to secure your patrol rifle and your pump shotgun between the driver and passenger seats where they are readily available and rapidly deployed.

COMPONENTS

All stainless steel and rubber gun lock. Shown with short mounting crossbar (replaced by 18" flat bar included with this kit.) Part no. SC-5



A simple, reliable, pump shotgun lock, that both secures your weapon, and keeps it from rattling while your vehicle is in motion. Part no. SC-1



Adjustable mounting hinge secures the SC-1 pump shotgun lock to the partition wall in the most secure and rattle free position available. Part no. 9302



(2) Hinge wings allow butt plates to be mounted directly to the transmission hump, or secured to the inside walls of a recessed partition. Part no. 9301



Adjustable steel butt plate accommodates almost every patrol rifle and pump / automatic shotgun available. Part no. sc-1900



18" long cross bar allows the SC-5 Universal lock to be repositioned to secure practically any variation of AR-15 / M4 rifle as well as auto matic shotguns. Part no. SC-502



Model SC-915-D-15





Dual Setup

for a pump shotgun plus any rifle
on the partition wall

Complete installation kit for a pump shotgun and rifle

Components included:

- o 1 x SC-5 gun lock (specify key: #2 or handcuff)
- o 1 x SC-1 gun lock (specify key: #2 or handcuff)
- o 2 x SC-1900 or 1901 butt plates
- o 1 x SC-502 18" long flat bar
- o 1 x SC-9302 mounting hinge
- o 2 x SC-9301 bottom hinges
- o nuts and bolts and installation instructions

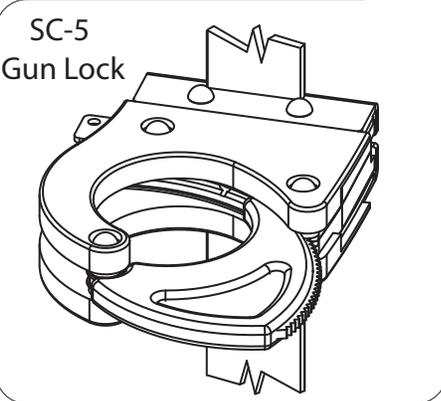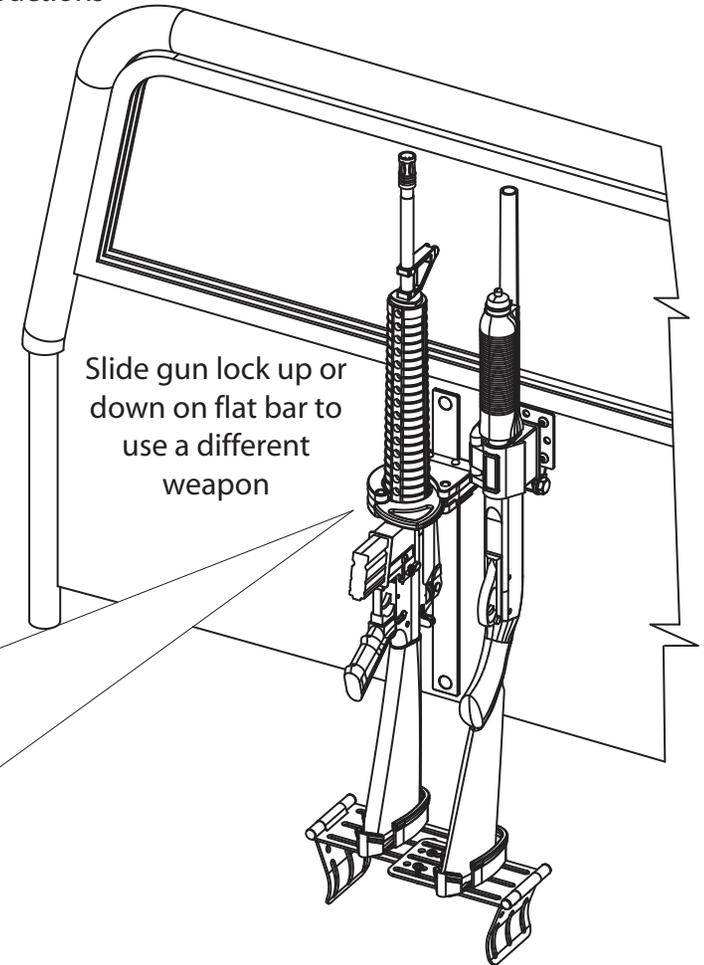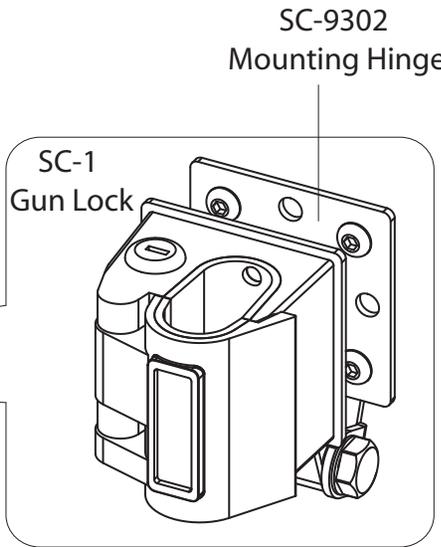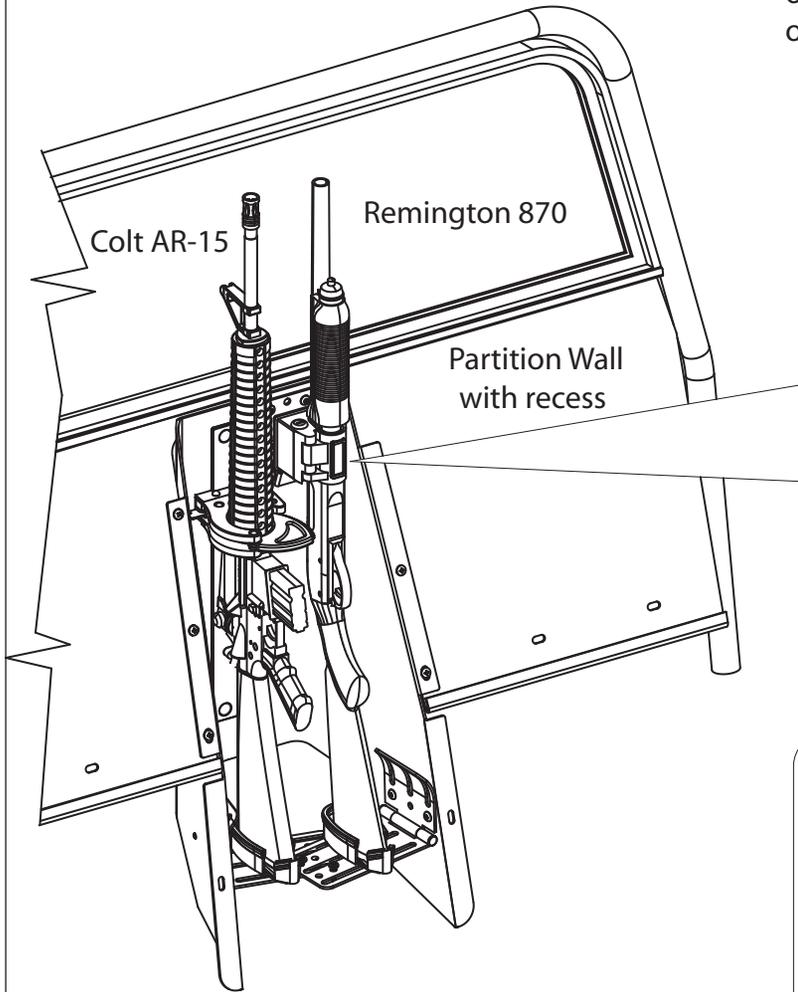

SC-9301 hinge wings are turned up and secured to inside of recess walls at both side. Long flat hinge leaves are resting on top of the drive shaft housing.

SC-9301 hinge wings are turned down and secured to sides of drive shaft housing from both sides. Long flat hinge leaves are resting on top of the drive shaft